



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样 品 承 认 书

品名： 56*10 共阴红绿色彩屏

规格： UL-1056ARG

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: UL-1056ARG

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)

Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\triangle \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Mean	Max	Typ.
Red	630-635	White Diff.	20	35	20	60	1.7	2.0	2.5	30-35
Green	570-572	White Diff	20	35	20	60	1.7	2.0	2.5	30-37

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUN RATINGS(Ta=25°C)

Reverse Voltage.....5V


Reverse Current(V_R=5V).....20 μ A

Operating Temperature Range.....-25°C ~+80°C

Storage Temperature Range.....-30°C ~+80°C

Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

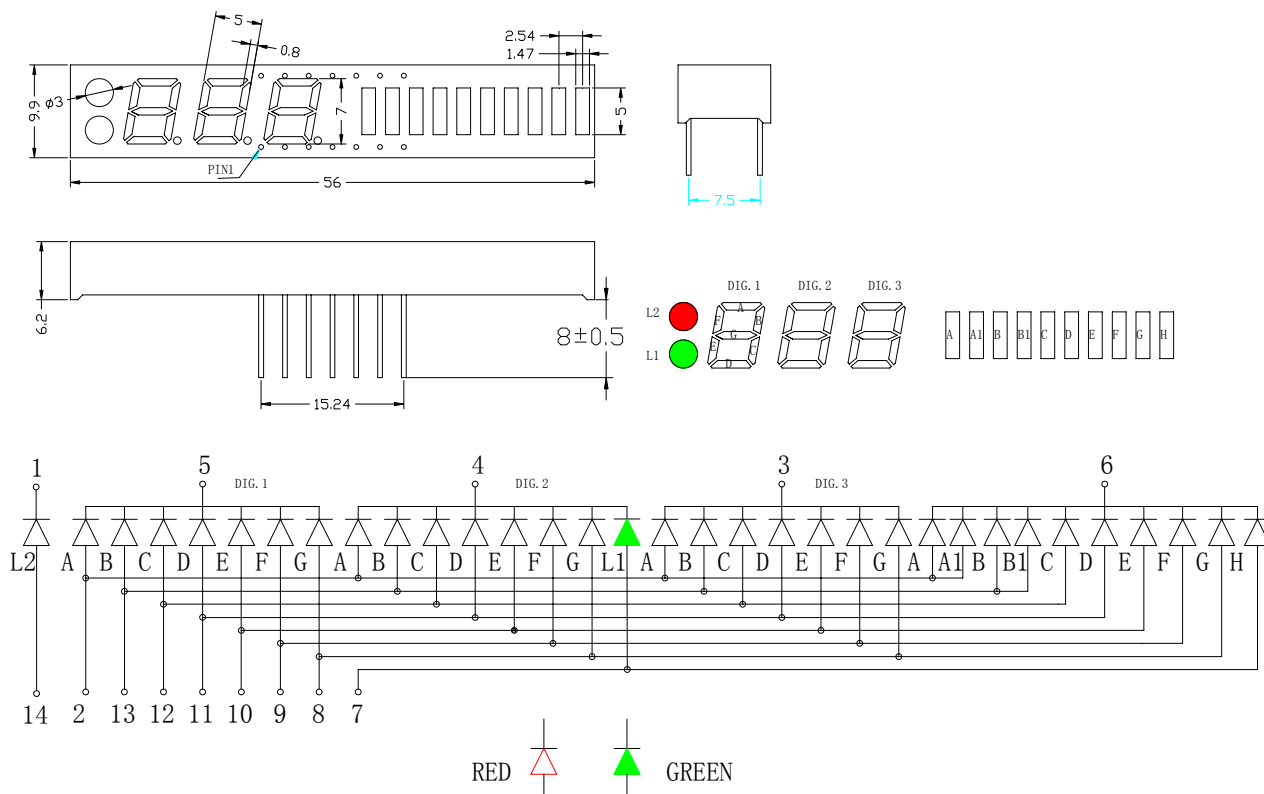

未注尺寸公差为: $\pm 0.2\text{mm}$

客户名称:

工程确认:






日期:



PART NO.: UL-1056ARG

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

RED:

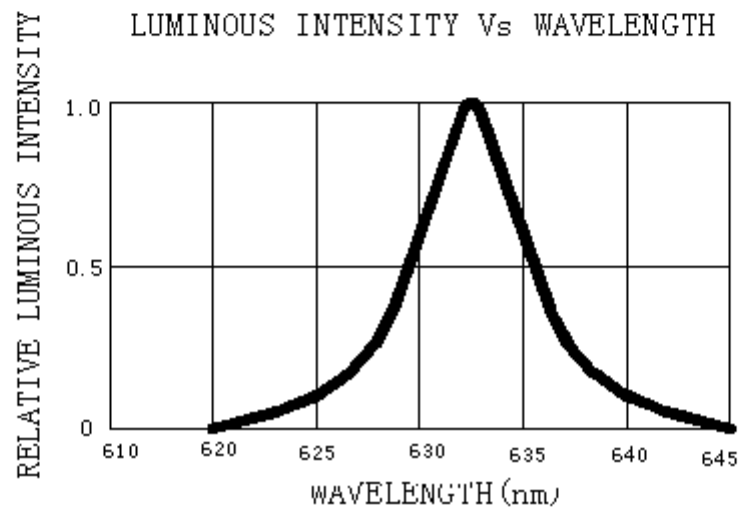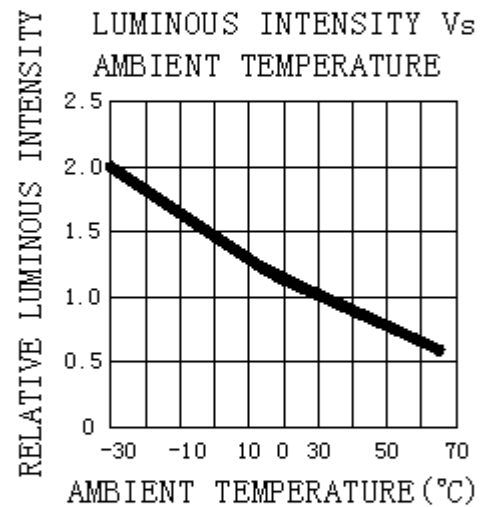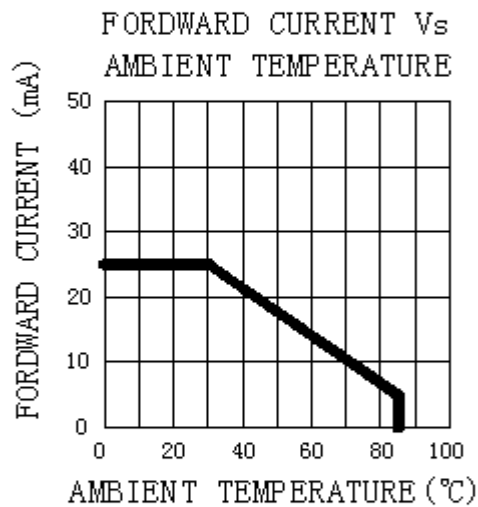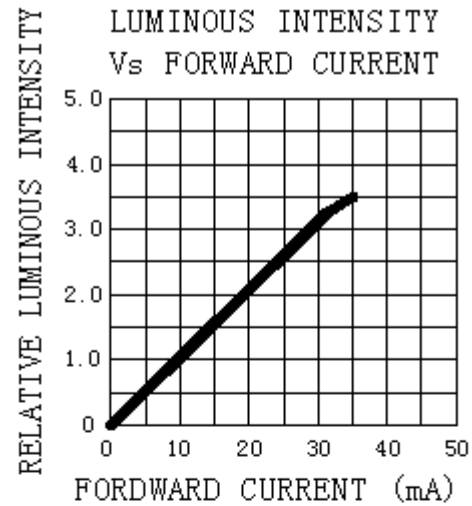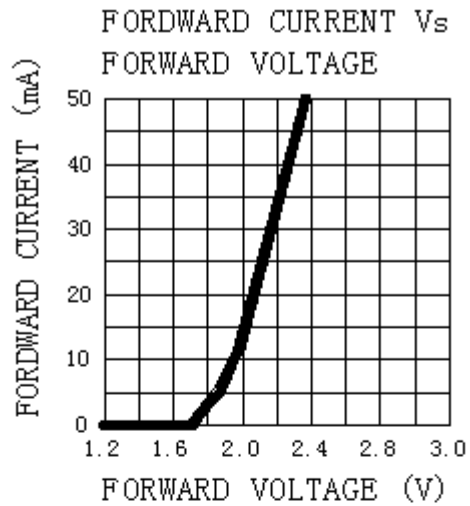



PART NO.: UL-1056ARG

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

Green:

