



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样 品 承 认

品名： 数码管 0.4”贴片共阴白色

规格： ULF-4400AW

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: ULF-4400AW

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C).

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Wave Length	λ_P	---	---	---	nm	IF=20mA(Note1)
Chromaticity	X	---	0.225	---	---	IF=20mA
Coordinates	Y	---	0.170	---		IF=20mA
Luminous Intensity	ϕ	---	2.2	---	LM	IF=20mA
Viewing Angle	2 θ 1/2	--	----	--	Deg	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUN RATINGS(Ta=25°C)

Reverse Voltage.....5V


Reverse Current(V_R=5V).....20 μ A

Operating Temperature Range.....-25°C~+80°C

Storage Temperature Range.....-30°C~+80°C

Lead Soldering Temperature..... 260°C For 5 Seconds

PACKAGE DIMENSION:

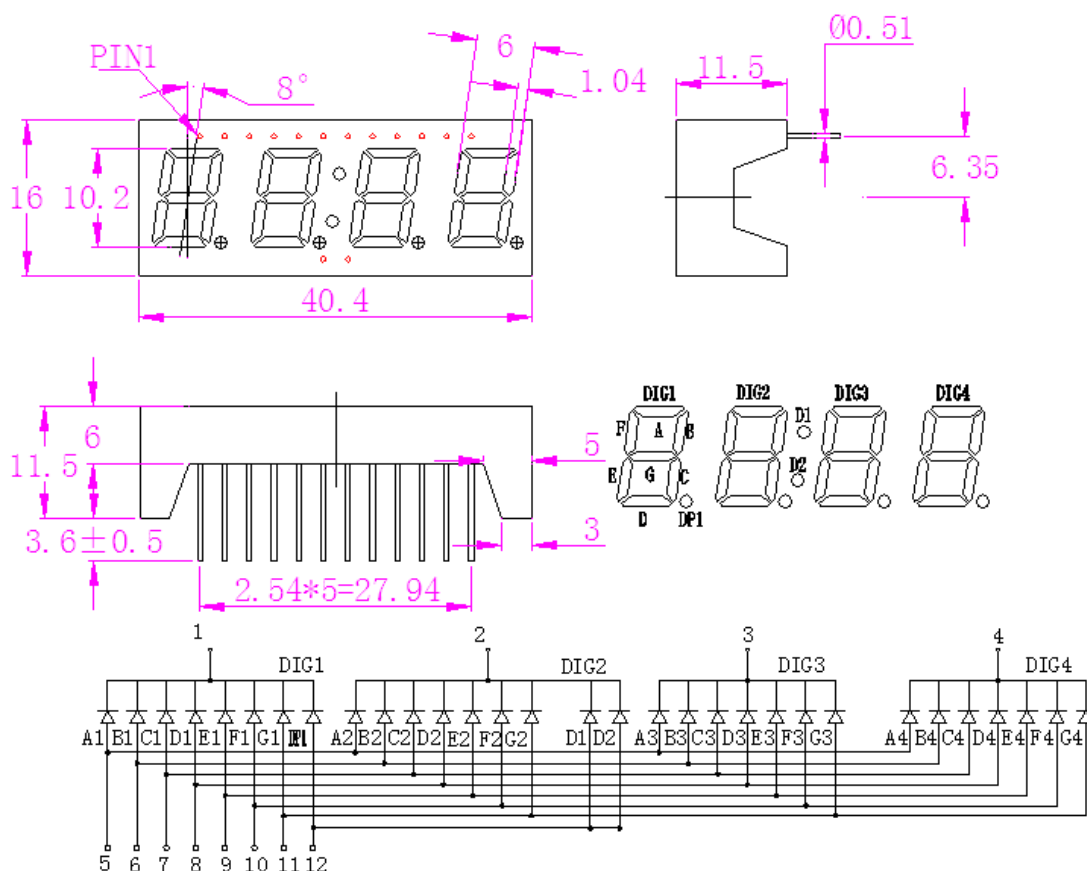

注：未标注尺寸公差为：±0.2

客户名称：

工程确认：


日期：



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: ULF-4400AW

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

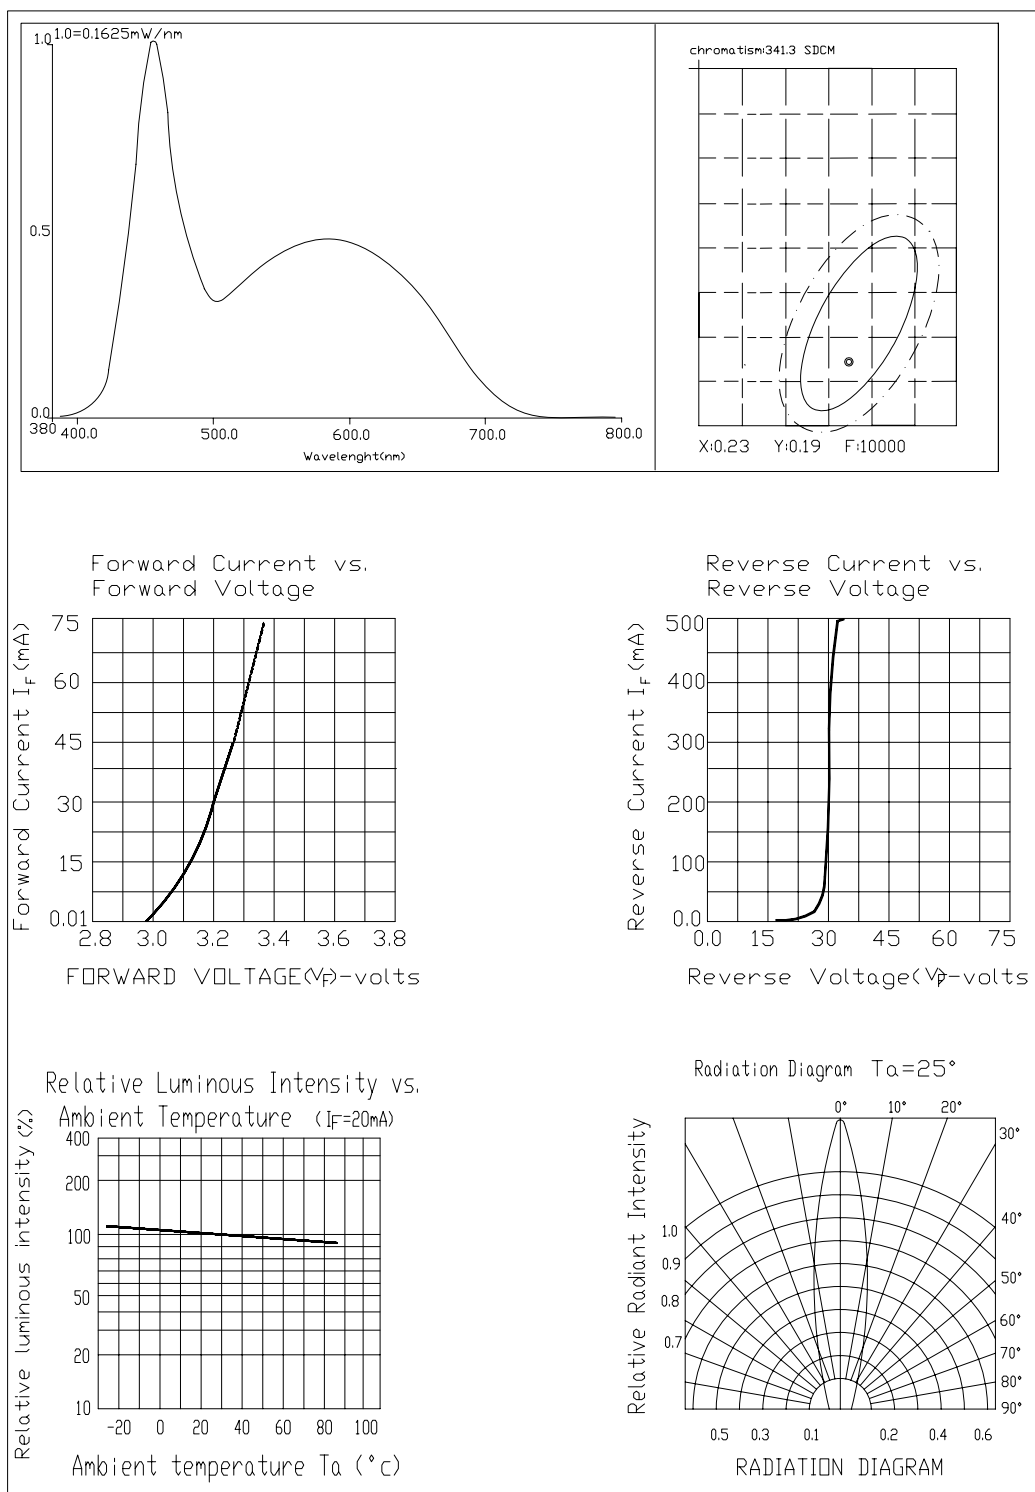

客户名称:

工程确认:

日期: