



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名： 数码管 0.56"四位共阴红色

规格： ULF-5462AS26

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路4号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: ULF-5462AS26

■ ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25℃)

Chip		Lens Appearance	Absolute Maximum				Electro-optical Data(AT20mA)			
Emitted	Peak Wave Length		$\triangle \lambda$ (nm)	Pd (mW)	If (mA)	Peak (mA)	Vf (V)			IV (mcd)
							Min	Typ	Max	Typ.
Red	630-635	White Diff.	30	35	20	60	1.7	2.0	2.5	30-35

Remark: Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

■ ABSOLUTE MAXIMUN RATINGS(Ta=25℃)

Reverse Voltage.....5V


Reverse Current($V_R=5V$).....20 μA

Operating Temperature Range.....-25℃~+80℃

Storage Temperature Range.....-30℃~+80℃

Lead Soldering Temperature.....260℃ For 5 Seconds

■ PACKAGE DIMENSION:

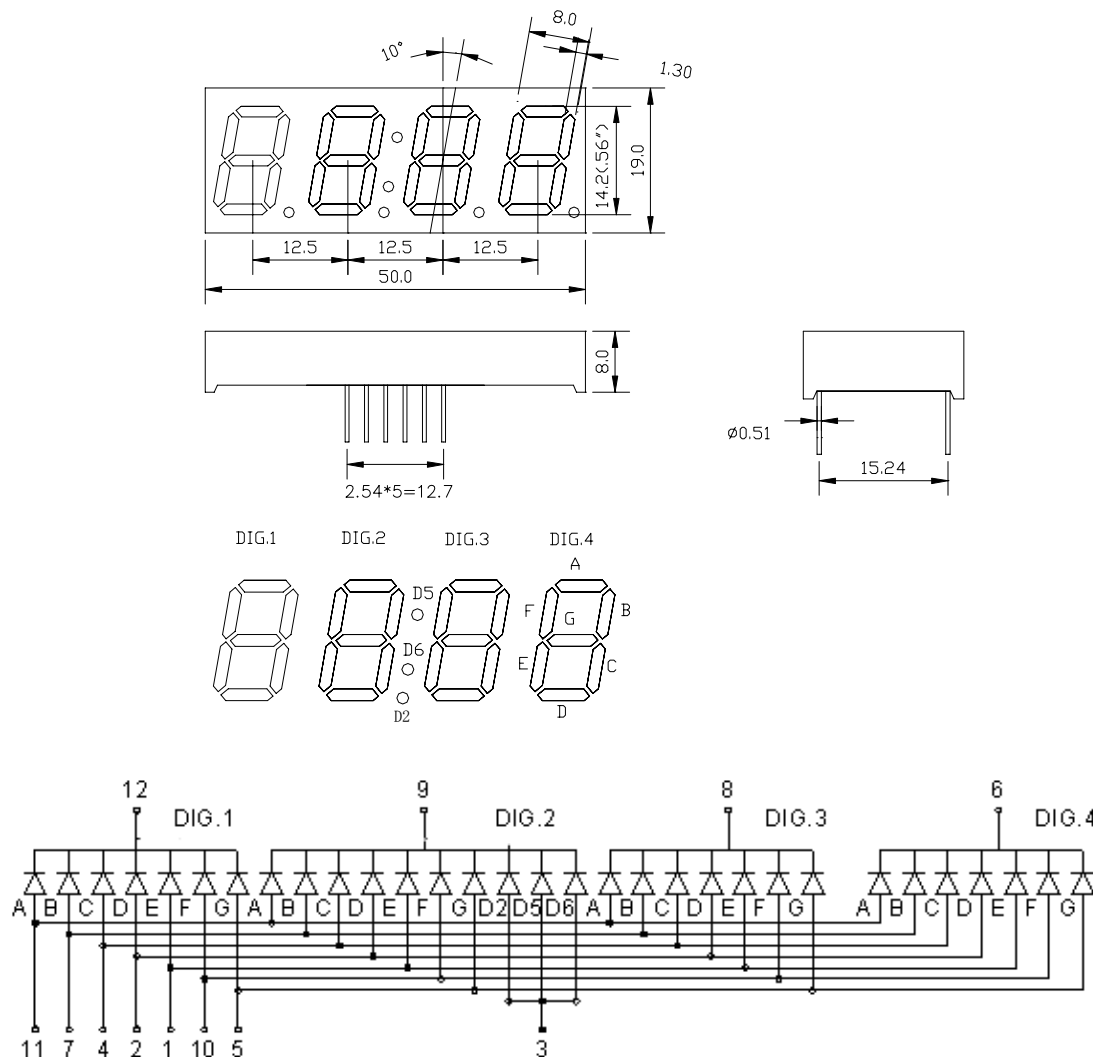

未标注尺寸公差±0.2

客户:

确认人:

日期:



中山市晶艺光电科技有限公司

ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: ULF-5462AS26

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

